


FS

▶

CAD

3D

COLOR CHANGING COLORFALLS

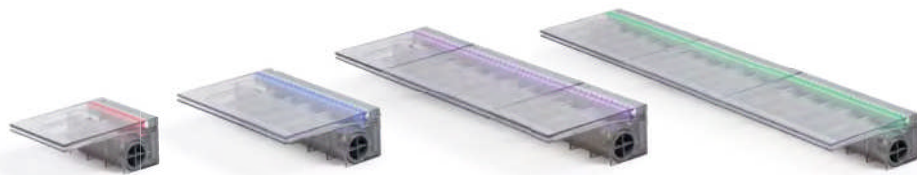

MODEL: CC06

MODEL: CC12

MODEL: CC24

MODEL: CC36

- Atlantic's Color Changing Colorfalls is the only modular sheer descent system with multiple light and configuration options, the most versatile way to add light and water to your landscape or hardscape
- Color Changing Colorfalls synchronize with Atlantic Hardscape and submersible lights to create illuminated landscapes
- Unlike other sheer descent waterfalls, Atlantic Color Changing Colorfalls may be linked together to create waterfalls of any width
- Create up to a 15-foot synchronized Color Changing Colorfalls using the Wiring Kit CCCM05
- Designed to install easily in any wall, indoors or out, whether stone, brick, block, stucco, tile or wood

- Atlantic's Color Changing Colorfalls' modular body style offers multiple inlets for maximum plumbing flexibility
- Generous weir openings resist clogging and create a thicker, fuller sheer for extra color and less wind deflection
- Colorfalls feature a 5" lip, 20' power cord and includes Color Changing Control Module, remote control and outdoor transformer
- For use with Formal Spillway Basins and Basin Kits

MODEL	LIST	FLOW RATE	PROJECTION*	INPUT VOLTAGE	WATTS	INLET	DIMENSIONS	WARRANTY
CC06	\$265.99	600 gph	8" - 10" at 18"H & 600 gph (Rec. Height: 20" max.)	12 volt DC / 6-wire	1-3 variable	1/2" FIPT	6"W x 8"D x 3 1/2"H	1-year
CC12	\$313.99	1,200 gph	8" - 10" at 18"H & 1,200 gph (Rec. Height: 20" max.)	12 volt DC / 6-wire	2-5 variable	1/2" FIPT	12"W x 8"D x 3 1/2"H	1-year
CC24	\$509.99	2,400 gph	8" - 10" at 18"H & 2,400 gph (Rec. Height: 30" max.)	12 volt DC / 6-wire	3-10 variable	1/2" FIPT	24"W x 8"D x 3 1/2"H	1-year
CC36	\$645.99	3,600 gph	8" - 10" at 18"H & 3,600 gph (Rec. Height: 40" max.)	12 volt DC / 6-wire	5-15 variable	1/2" FIPT	36"W x 8"D x 3 1/2"H	1-year

* Projection is measured from the face of the wall the Colorfalls is installed in


DID YOU KNOW?

Your Color Changing Colorfalls are fully compatible with all Atlantic Color Changing Lighting and the new InfiColor Smart Module and App. How? Newer lighting includes a Plug Adapter for use with Color Changing Modules and wiring. The new InfiColor Smart Module includes a Pigtail Adapter for backwards compatibility with Color Changing Colorfalls and SOL Color Changing Lighting. Page 76-77



COLOR CHANGING COLORFALLS FEATURES:

1. Large weir opening produces a thick sheer for less wind deflection, more color and less chance of clogging.
2. Redesigned internal lip supports eliminate splitting of the water sheer.
3. 1 1/2" FIPT inlets on both sides and back for maximum plumbing options and versatility.
4. Includes (2) 1 1/2" plugs for unused plumbing inlets.
5. Self-draining body for easy winterization.
6. Removable baffle for easy cleaning and servicing.
7. Color Changing LED light bar is accessible from the rear of the unit for servicing.
8. Removable back plate provides access to the interior and light bar for routine maintenance.
9. Threaded adapter with silicone O-rings to connect multiple Color Changing Colorfalls.

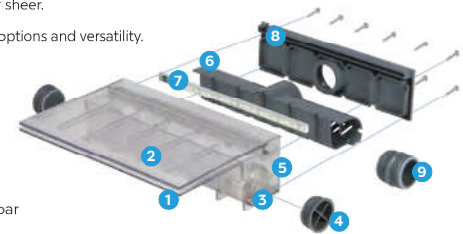

CONTROL MODULE FEATURES:



Input Voltage: 12 Volt AC
Output Voltage: 12 Volt DC / 6-wire
Max Load: 80 watts

Each Color Changing Colorfalls includes a Control Module & Remote Control

- Weatherproof enclosure with external antenna
- 48 vibrant color options and 18 preset modes
- 2.4GHz RF frequency for increased range
- Touch remote with simplified functions
- Synchronize Atlantic Color Changing Lighting with Colorfalls for brilliant nighttime effects



Color Changing lighting shown on page 70-77

COLOR CHANGING COLORFALLS WIRING KIT

Whether you want to create a single, seamless waterfall up to 15 feet wide, synchronize multiple Color Changing Colorfalls or link any Color Changing Lights to your Colorfalls, the 60 watt CCCM05 Color Changing Colorfalls Wiring Kit makes connecting them all together simple. Just plug each component in, synchronize and control all with a single remote!



MODEL	LIST	INPUT	OUTPUT	DIMENSIONS	TRANSFORMER	SPLITTERS	WARRANTY
CCCM05	\$102.99	120 volt AC	12 volt AC / 60 watts	6"L x 3 1/4"D x 3 1/4"H	60 watt	(2) 3-way / 6-wire	1-year